

# PERISTALTIC PUMP

Data  
Sheet

## DESCRIZIONE

- ✓ Peristaltic pump with flow rate regulation
- ✓ PP body reinforced with 30% talc
- ✓ Polycarbonate front panel
- ✓ Standard 230 Vac power supply
- ✓ 10-100% speed regulation
- ✓ 100 % Made in Italy
- ✓ CE regulation compliant



## OPTIONAL

- ✓ ON / OFF switch
- ✓ SCHUKO plug
- ✓ Level probe predisposition


DESCRIPTION		
	Standard Material	Upon Request
<b>Versione standard</b>		
Pump body	PP polipropilene with 30 %glass	#####
Roller	DELIRIN	#####
Tube	Santoprene	Silicon
Power Supply	230 v 50 – 60 Hz	#####
Consumption	35 Watts	-----
Net Weight	0,5 kg.	#####
Nuts	PP 1/8"	#####
Fittings	PP 4 x 6 mm	#####
Standard Version	230 Vac	24 VCC
<b>DETERGENCY KIT</b>		
	<b>DETERGENT</b>	<b>RINSE AID</b>
Suction tube	PVC 4 x 6	PVC 4 x 6
Delivery tube	PVC 4 x 6	PE 4 x 6
Injection fitting	PP 90°	1/8" ACCIAIO
Foot filter	AISI Rubber Holder	AISI Rubber Holder

Specifications subject to change without notice

# PERISTALTIC PUMP

Data Sheet

SPECIFICHE TECNICHE											
Standard	Max lt/h	pressure		Max cc / min	Tube	Dimensio ns	Pump \$!%&	Watt	RPM	Weight	
		Bar	PSI							:"	Lbs
<b>VERSION 230VAC</b>											
06 - 01	06	01	(1<>	100	Santoprene	5,8 x 9,4	PP	35	40	0,5	1,2

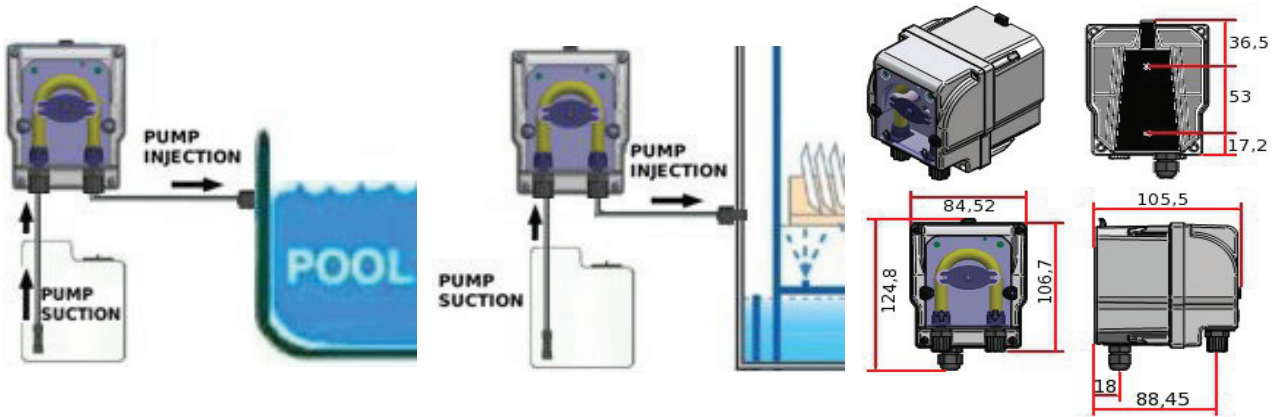

Specifications subject to change without notice